



The i-Series, a sleek, energy-efficient LED fixture, is scalable to virtually any monitor. Cool-to-the-touch, the i-Series fixtures make it easy to look your best on camera, allowing individuals to conference remotely without sacrificing critical visual details.

The many non-verbal nuances of facial expression and eye contact are critical to effective communications. The i-Series enhances visual clarity, thereby increasing the readable content within a video image and raising the engagement level of participants in the conference.

Specifications

Construction

.078" thick aluminum extruded housing. Aluminum cast end caps. .09" aluminum reflector powder-coated gloss-white. A smooth gloss-black powder-coated finish is standard, with custom colors available by request.

Electrical

6-ft (1.8-m) power cord with built-in low voltage transformer (Input 100-240V AC 50/60 Hz) connects to fixture housing using single pin connector. Plug is a NEMA 1-15P and is standard for 120V fixtures. Two level toggle switching is standard. In-line rotary dimming transformer also available. 12V high power LED strips mounted on reflector.

Individual Fixture Wattage

i-S/16: 15W i-S/22: 20W i-S/36: 35W i-S/48: 45W i-S/48/D: 90W

Mounting

Fixtures are supplied with a mounting adapter that works with many mounting options, including 75mm - 200mm VESA with flex arm, Cart and Stand. (Please specify on order. Mounting bracket sold separately.)

Louver and Lens

Fixtures are provided with 1/2" x 1/2" black egg crate louver and LED film.

Dimensions


The fixture has dimensions of 1.71" [43.43mm] single or 3.21" [81.53mm] double-high x 3.5" [88.9mm] deep x 16.16" [410.43mm], 22.41" [569.21mm], 36.16" [918.46mm] or 48.03" [1219.96mm] long.

Labels



CE, UL, cUL, CCC, and PSE certifications pending. Patent Pending.




Smooth gloss black powder coated finish is standard. Custom colors are available by request.

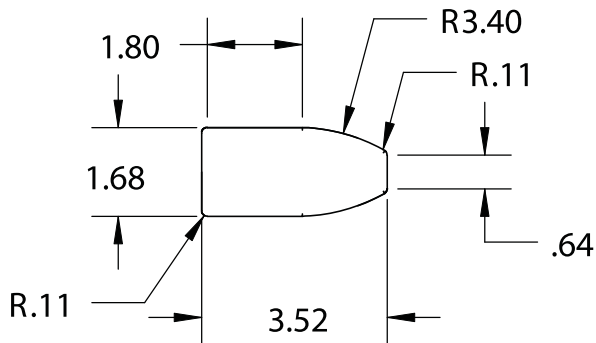

Dimensions in inches

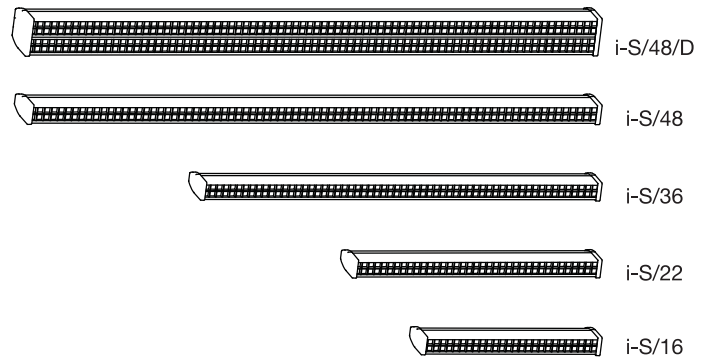

VESA 100-200

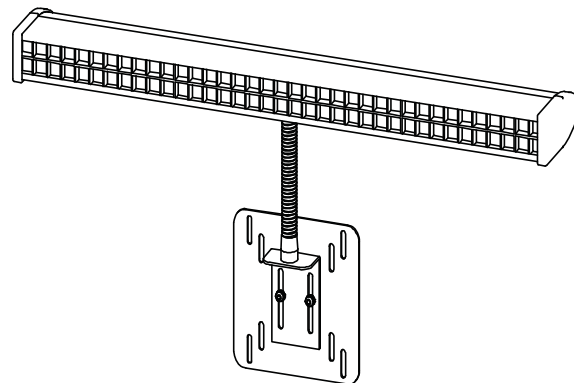

VESA 75-100

Please reference these part numbers when ordering:

i-S/16	16-inch i-Series Monitor Light
i-S/22	22-inch i-Series Monitor Light
i-S/36	36-inch i-Series Monitor Light
i-S/48	48-inch i-Series Monitor Light
i-S/48/D	48-inch Double i-Series Monitor Light